

Gilpin Masonry

Gilpin Masonry Construction Company Inc.
100 Sea Otter Circle
Midway Kentucky 40347

gilpinmasonry.com
Phone/Fax 502-863-2940
Cell 859-621-6416
emanuel@gilpinmasonry.com

November 22, 2017

Lexington Fayette Urban County Government
200 East Main Street
Lexington, Kentucky

Fitzsimmons Office of Architecture
112 West Third Street
Lexington, Kentucky 40507

Re: Request for Change Order to Morton House Improvements
Bid #103-2017, Resolution #567-2017

DEDUCTION:

Deduction from original contract of \$1,453.00 for the city to provide and install all of the conduit and connections as needed for the electrical service to the container unit. Gilpin Masonry will dig the ditch between the pad and the building.

Deduct the cost of laying the brick on the columns, \$2,350.00 for labor and \$570.00 for materials. Total deduction \$2,920.00

ADDITION:


Add to the cost of the contract for providing one additional stone beneath the caps the city has in storage. The plans asked that we provide one new stone but it was later discovered that two new stones are needed. The cost of this new stone is \$690.00. Installation was included in the original bid.

Add to the cost of the contract for replacing damaged block in the play area as well as minor tuckpointing and caulking replacement. This will be an additional cost of \$4,745.00

SUMMARY:

This change order will result in a net addition to the contract of \$1,062.00

Emanuel Gilpin

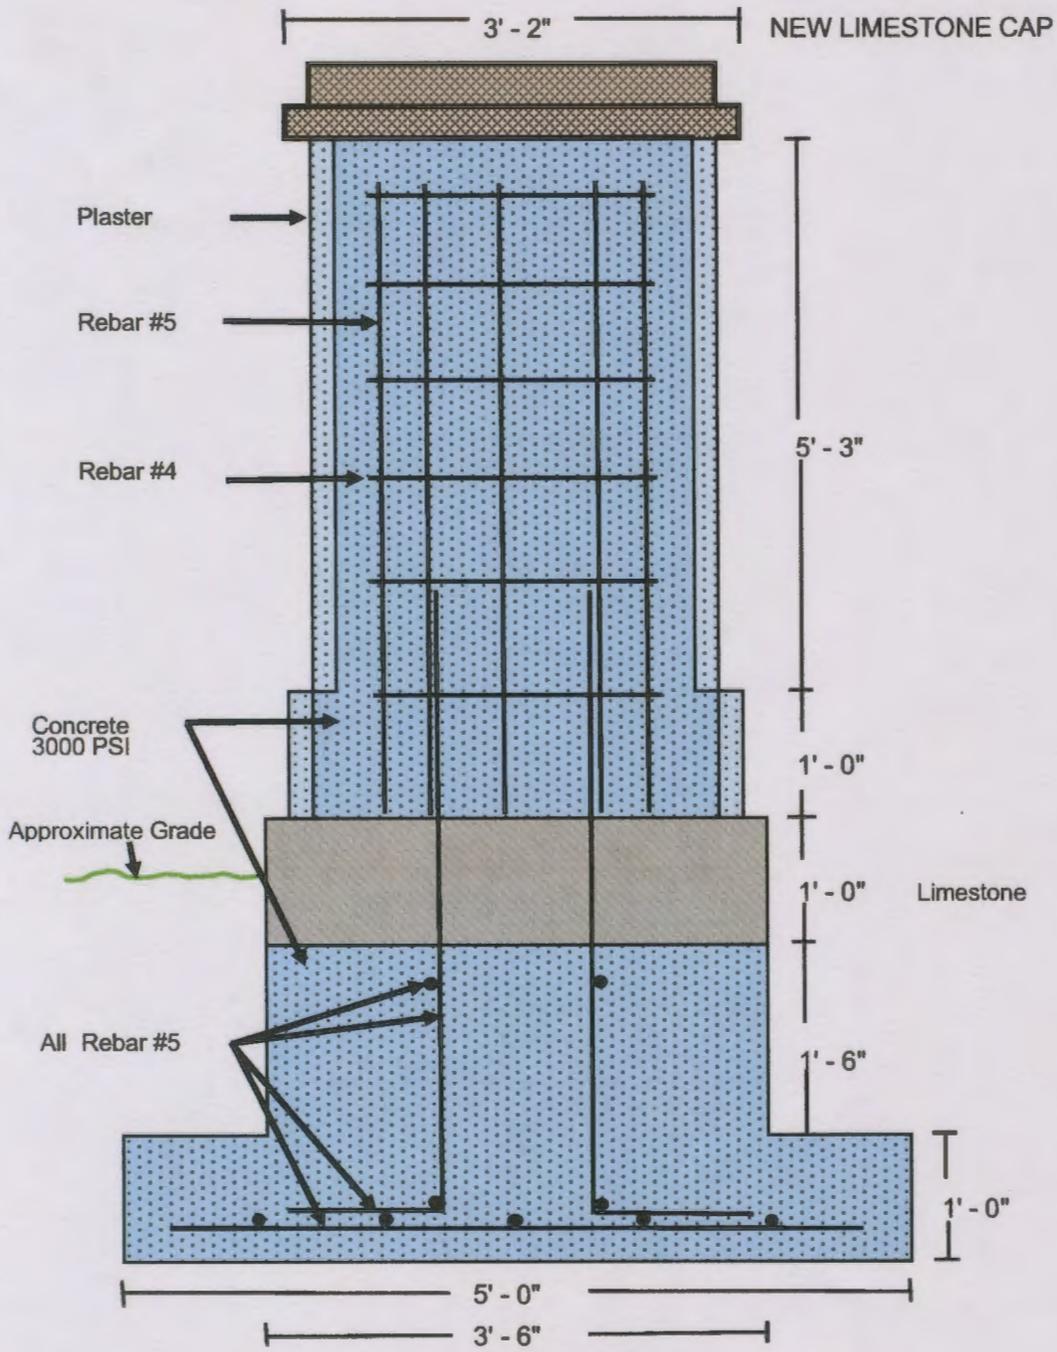

**GATEPOST REHABILITATION
530 NORTH LIMESTONE**

SHOP DRAWING FOR GILPIN MASONRY
SUBMITTED NOVEMBER 14, 2017

Emanuel T. Gilpin II

ICS Cut Ticket:

Job:

Gilpin Masonry





Stone: Buff

Date:

10-17-17

Ships:

Length	Breadth	Height	Cube
38"	38"	3 3/4"	

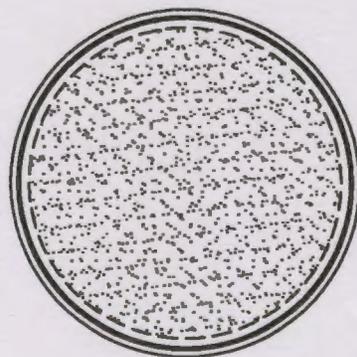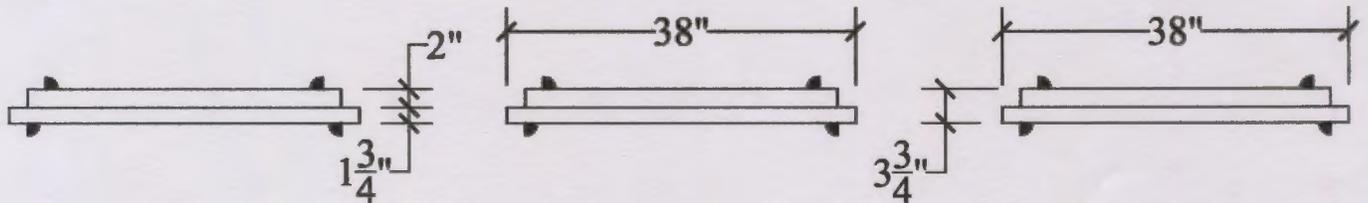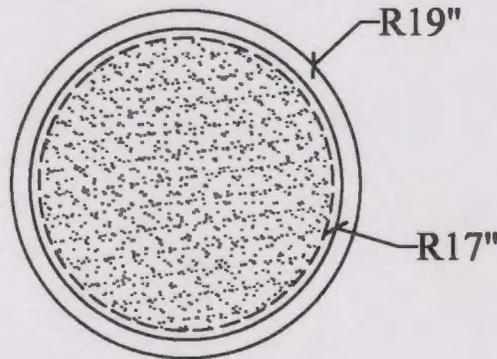

DRIP
DETAIL

Quantity


2

Truck No.

ONE &
ONLY


Ticket No.

A-1

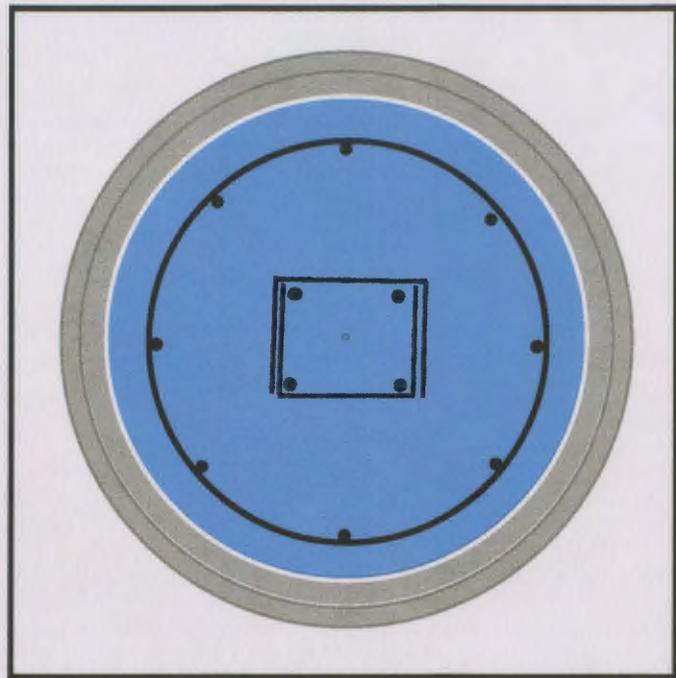


**GATEPOST REHABILITATION
530 NORTH LIMESTONE**

SHOP DRAWING FOR GILPIN MASONRY
SUBMITTED NOVEMBER 14, 2017




3' - 6"

Emanuel T Gilpin II

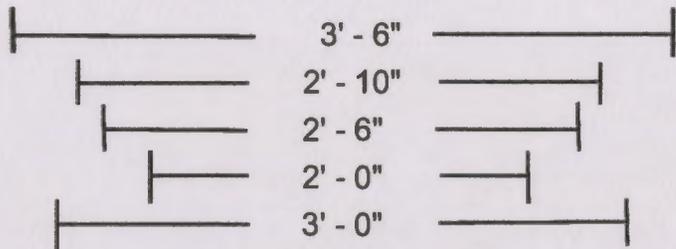

- OUTSIDE DIMENSION OF STONE FOUNDATION
- OUTSIDE DIMENSION OF PLASTER
- 30" DIAMETER SONOTUBE
- REBAR CAGE (VERTICAL BARS #5 HORIZONTAL BARS #4)
- OUTSIDE DIMENSION OF BASE RING OF PLASTER

COLUMN TOP VIEW

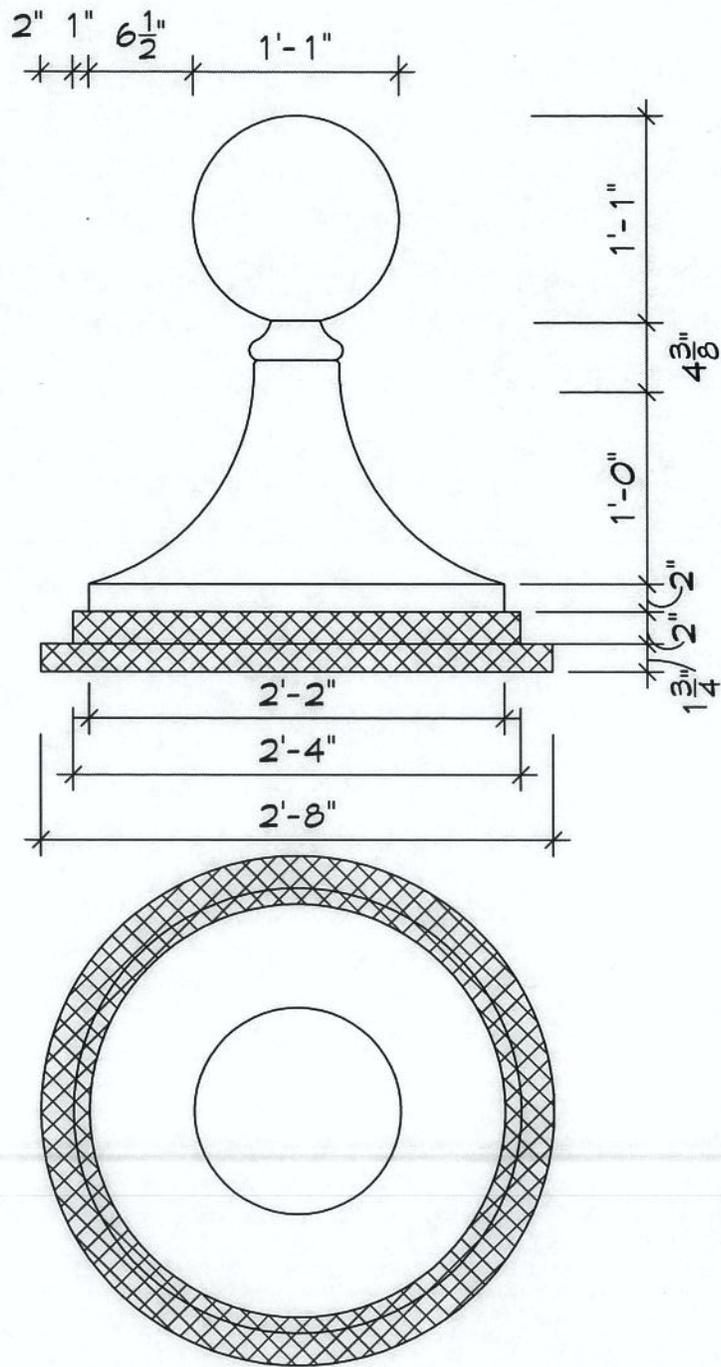

5
A2

Limestone Caps

