


JUSTIFICATION FOR CHANGE

PROJECT: Senior Citizen Center Construction

CONTRACT NO. 227-2014

CHANGE ORDER: 7

1. Necessity for change: Unsuitable soils discovered at column footings F.5/3.5 & 4.2, E.9/3.5 & 4.2 and elevator pit footings. Undercut and fill with flowable fill.
2. Is proposed change an alternate bid? ___Yes XNo
3. Will proposed change alter the physical size of the project? ___Yes XNo
If "Yes", explain.
4. Effect of this change on other prime contractors: N/A
5. Has consent of surety been obtained? ___Yes XNot Necessary
6. Will this change affect expiration or extent of insurance coverage? ___Yes XNo
If "Yes", will the policies be extended? ___Yes ___No
7. Effect on operation and maintenance costs: N/A
8. Effect on contract completion date: Add 1.5 days.



Mayor

2-9-15
Date



LFUCG-Senior Center Soil Remediation Worksheet

Description	Unit Rates	Quantities		Sub-Totals
		Recorded		
Structural Over Excavation (Soil)-CYDS	\$7.00	53.63		\$375.41
Load and Haul Excess Over-Excavation Soils Off Site-CYDS	\$7.00	53.63		\$375.41
Structural Back Fill (DGA)-Tons	\$25.00			\$0.00
Structural Backfill (Structural Flowable Fill)-CYDS	\$150.00	53.63		\$8,044.50
Overhead Daily Cost	\$449.25	1.5		\$673.88
Time Delay		1.5		
We request 1.5 days be added to the schedule due to the large excavation/pour and the pour not being completed until 0715 PM.				
Total Cost=				\$9,469.20



THELEN ASSOCIATES, INC.

Geotechnical • Testing Engineers

125 Trade Street, Suite D, Lexington, KY 40511 / 859-226-0761
Erlanger, Kentucky • Cincinnati, Ohio • Dayton, Ohio

DRAFT


CLIENT: LFUCG
PROJECT: Senior Center
SUBJECT: Undercut

PROJECT NO: 140955
DATE: 4/23/15
ENGINEER: SM
CHECKED: _____
SHEET: 1 OF 1

Cal. Footings @ C.L. F.5/3.5 + 4.2
+ E.9/3.5 + 4.2
flow carry-over
@ 915 PM. Elevate Pier Footings

- Bearing observation revealed top soil.
- Undercut to 24" below.
soil tan to grey, saturated silty clay. -1000 psf.
- Undercut to 5' below bearing
tan to grey, saturated silty clay
w/ large void located @
Top of Rock.
- Undercut to expose apparent
bedrock.

Total depth \approx 6' below bearing.
total volume \approx 192" x 181" x 72"
E.9 53.63 yd³

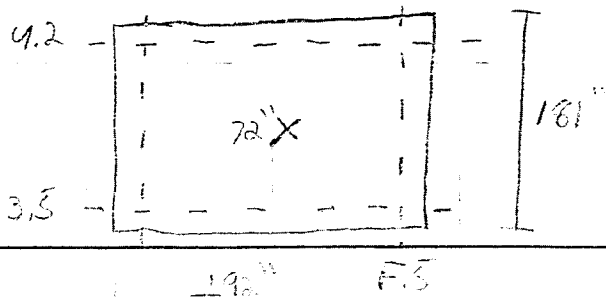

Flowable Fill placed.



Lexington-Fayette Urban County Government
DEPARTMENT OF GENERAL SERVICES

TRANSMITTAL

Date: February 9, 2015

Contract Number: 227-2014

Purchase Order Number: LF00120278

Bid Package Number: 99-2014

Capital Project Number: TBD

Work Order Number: N/A

Building: Senior Citizen Center

Project Description: Replacement Senior Citizen Center Construction

To: Josh Marrillia, Marrillia Design & Construction RE: Change Order #7

CC: Meredith Nelson, Council Clerk
Trina Brown, Social Services

From: Joyce Thomas, General Services *JT*

We Are Sending You:

Contract

Operation and Maintenance Manuals

Warranties

Attached

Payment Application

Plans

Item	Copies	Description	Pages	Date
1.	1	Change Order #6 – Fully Executed Copy	4	2/9/15

THESE ARE TRANSMITTED AS INDICATED BELOW:

FOR APPROVAL

FOR ACTION

FOR YOUR USE

FOR FILE

FOR YOUR REVIEW AND COMMENT

FOR SIGNATURE

OTHER:

REPLY BY _____ TO AVOID DELAY IN CONSTRUCTION

Remarks: